

# S系列合金型 (1A-5A)



温度保险丝专业制造商始于1980年  
Professional thermal cut offs manufacturer since 1980








 ROHS REACH

## 外观和外形尺寸(mm)

系列	a	b	c	d	e
S	6.2±0.5	6.3±0.5	2.5±0.3	Φ0.50±0.05	70±3
S-1A	5.2±0.5	4.0±0.5	2.3±0.2	Φ0.50±0.05	70±3
S-3A	6.2±0.5	6.3±0.5	2.5±0.3	Φ0.60±0.05	70±3
S-5A	6.6±0.5	8.0±0.5	2.6±0.3	Φ0.60±0.05	70±3

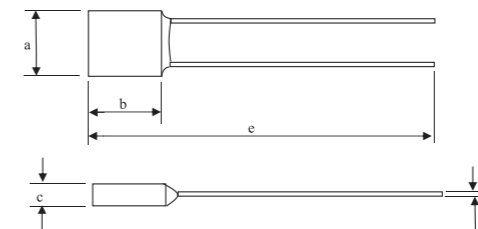

## 主要技术参数

### S系列

型号	额定动作温度(Tf)	实测动作温度	保持温度(Th)	极限温度(Tm)	额定电流(A)	额定电压(Vac)	通过认证								
							UL	CB	CCC	CE	CCC	CCC	CCC	CCC	CCC
S0	86°C	82±2°C	66°C	203°C	2	250	●	●	●	●	●	●	●	●	○
S1	95°C	90±3°C	75°C	203°C	2	250	●	●	●	●	●	●	●	●	○
S2	102°C	98±3°C	82°C	203°C	2	250	●	●	●	●	●	●	●	●	○
S3	115°C	112±3°C	95°C	203°C	2	250	●	●	●	●	●	●	●	●	○
S4	125°C	120±3°C	105°C	203°C	2	250	●	●	●	●	●	●	●	●	○
S5	130°C	126±2°C	110°C	203°C	2	250	●	●	●	●	●	●	●	●	○
S6	135°C	131±3°C	115°C	203°C	2	250	●	●	●	●	●	●	●	●	○
S7	145°C	140±2°C	125°C	203°C	2	250	●	●	●	●	●	●	●	●	○
S8	150°C	145±3°C	130°C	203°C	2	250	●	●	●	●	●	●	●	●	○

### S-1A系列

型号	额定动作温度(Tf)	实测动作温度	保持温度(Th)	极限温度(Tm)	额定电流(A)	额定电压(Vac)	通过认证								
							UL	CB	CCC	CE	CCC	CCC	CCC	CCC	CCC
S0-1A	86°C	82±2°C	66°C	203°C	1	250	●	●	●	●	●	●	●	●	○
S1-1A	95°C	90±3°C	75°C	203°C	1	250	●	●	●	●	●	●	●	●	○
S2-1A	102°C	98±3°C	82°C	203°C	1	250	●	●	●	●	●	●	●	●	○
S3-1A	115°C	112±3°C	95°C	203°C	1	250	●	●	●	●	●	●	●	●	○
S4-1A	125°C	120±3°C	105°C	203°C	1	250	●	●	●	●	●	●	●	●	○
S5-1A	130°C	126±2°C	110°C	203°C	1	250	●	●	●	●	●	●	●	●	○
S6-1A	135°C	131±3°C	115°C	203°C	1	250	●	●	●	●	●	●	●	●	○
S7-1A	145°C	140±2°C	125°C	203°C	1	250	●	●	●	●	●	●	●	●	○
S8-1A	150°C	145±3°C	130°C	203°C	1	250	●	●	●	●	●	●	●	●	○

### S-3A系列

型号	额定动作温度(Tf)	实测动作温度	保持温度(Th)	极限温度(Tm)	额定电流(A)	额定电压(Vac)	通过认证								
							UL	CB	CCC	CE	CCC	CCC	CCC	CCC	CCC
S0-3A	86°C	82±2°C	66°C	203°C	3	250	●	●	●	●	●	●	●	●	○
S1-3A	95°C	90±3°C	75°C	203°C	3	250	●	●	●	●	●	●	●	●	○
S2-3A	102°C	98±3°C	82°C	203°C	3	250	●	●	●	●	●	●	●	●	○
S3-3A	115°C	112±3°C	95°C	203°C	3	250	●	●	●	●	●	●	●	●	○
S4-3A	125°C	120±3°C	105°C	203°C	3	250	●	●	●	●	●	●	●	●	○
S5-3A	130°C	126±2°C	110°C	203°C	3	250	●	●	●	●	●	●	●	●	○
S6-3A	135°C	131±3°C	115°C	203°C	3	250	●	●	●	●	●	●	●	●	○
S7-3A	145°C	140±2°C	125°C	203°C	3	250	●	●	●	●	●	●	●	●	○
S8-3A	150°C	145±3°C	130°C	203°C	3	250	●	●	●	●	●	●	●	●	○

### S-5A系列

型号	额定动作温度(Tf)	实测动作温度	保持温度(Th)	极限温度(Tm)	额定电流(A)	额定电压(Vac)	通过认证								
							UL	CB	CCC	CE	CCC	CCC	CCC	CCC	CCC
S0-5A	86°C	82±2°C	66°C	203°C	5	250	●	●	●	●	●	●	●	●	○
S1-5A	95°C	90±3°C	75°C	203°C	5	250	●	●	●	●	●	●	●	●	○
S2-5A	102°C	98±3°C	82°C	203°C	5	250	●	●	●	●	●	●	●	●	○
S3-5A	115°C	112±3°C	95°C	203°C	5	250	●	●	●	●	●	●	●	●	○
S4-5A	125°C	120±3°C	105°C	203°C	5	250	●	●	●	●	●	●	●	●	○
S5-5A	130°C	126±2°C	110°C	203°C	5	250	●	●	●	●	●	●	●	●	○
S6-5A	135°C	131±3°C	115°C	203°C	5	250	●	●	●	●	●	●	●	●	○
S7-5A	145°C	140±2°C	125°C	203°C	5	250	●	●	●	●	●	●	●	●	○
S8-5A	150°C	145±3°C	130°C	203°C	5	250	●	●	●	●	●	●	●	●	○

注“●”表示已通过认证，“○”表示计划中